




## FLUSH MOUNTING BOXES

# ULTRA JUNCTION BOXES

### TECHNICAL DATA SHEET

Reference	LVD 2014/35/EU		
Directives & Standards	EN 60670-1:2005+A1:2013 Boxes and Enclosures, Electrical Installations EN 60670-22:2006 Boxes and Enclosures, Particular Requirements		
Amount of Halogen Acid Gas:	DIN EN 60754-1 (VDE 0482-754-1) : 2015-08 EN 60754-1:2014		
Applications	In Door - Residential - Industrial		
Installations	Plastic Square Junction box with Height -adjustable cover Wiring junction or extension With Knockout Conduits entries Flush mounting – Masonry		
Structural Material	Modified Thermoplastic Polyolefin		
Characteristics	IP Rate	3X	
	Glow Wire Test	650 °C	
	Resistance UV	LR	
	Resistance Chemicals	R	
	Resistance Fire	FR-SE	
	Dielectric strength	400V	
	Temperature Range	-15 °C	+60 °C
Reference	Color: Box	Orange (RAL 2004)	Lid White




## FLUSH MOUNTING BOXES

### JUNCTION ULTRA 80x80



TYPE	ULTRA 80 x 80	LID 80
CODE	08-21003-080	09-21003-075
A / mm	82	-
B / mm	90	90
C / mm	45	48
Entries Max OD Ø20mm	4	-
Entries Max OD Ø20/28mm	4	-
Packing / pcs	50	1

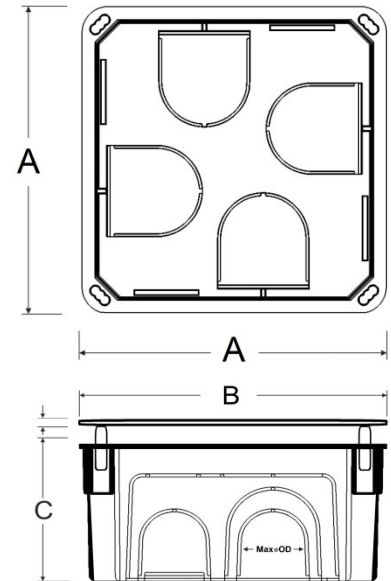

### JUNCTION ULTRA 105 x 105



TYPE	ULTRA 105 x 105	ΚΑΠΑΚΙ 105
CODE	08-21004-105	09-21004-105
A / mm	105	-
B / mm	115.5	115.5
C / mm	45	48
Entries Max OD Ø20mm	8	-
Entries Max OD Ø20/28mm	4	-
Packing / pcs	40	1

