



**HALOGEN Free
CONDUITS & ACCESSORIES**

05

HALOGEN Free CONDUITS CORRUGATED - SPIRAL

SPIRAL HF - Light Type 320N



PRODUCT DESCRIPTION

- Corrugated, Pliable - Spiral
- Material : Modified Thermoplastic Polyolefin
- Compression Resistant : Light

APPLICATIONS - INSTALLATIONS

- Indoor - Residential - Industrial
- Cable Protection and Routing through masonry
- Flush mounted
- Cable Management System with support and connection accessories

CODE	TYPE	DIAMETER		LENGTH m	PACKING m
		D1/mm	D2/mm		
07-21007-016	16	16	10,7	100	100
07-21008-020	20	20	14,5	100	100
07-21009-025	25	25	19	50	50
07-21010-032	32	32	24,3	50	50
07-21011-040	40	40	31,2	25	25
07-21012-050	50	50	39,6	25	25



COMBO SPIRAL HFFR - Light Type 320N



PRODUCT DESCRIPTION

- Corrugated, Pliable - Spiral
- Material : Modified Thermoplastic Polyolefin
- No flame propagation, Self Extinguishing
- Halogen Free

APPLICATIONS - INSTALLATIONS

- Indoor - Residential - Industrial
- Flush mounted, Exposed
- Cable Protection and Routing
- Cable Management System with support and connection accessories

CODE	TYPE	DIAMETER		LENGTH m	PACKING m
		D1/mm	D2/mm		
31-21070-016	16	16	11	100	100
31-21071-020	20	20	14	100	100
31-21072-025	25	25	19,2	50	50
31-21073-032	32	32	24,3	50	50
31-21074-040	40	40	31,2	25	25
31-21075-050	50	50	39,6	25	25



COMBO SPIRAL HFFR - Light Type 320N + Wire



PRODUCT DESCRIPTION

- Corrugated, Pliable - Spiral
- Material : Modified Thermoplastic Polyolefin
- No flame propagation, Self Extinguishing
- Halogen Free

APPLICATIONS - INSTALLATIONS

- Indoor - Residential - Industrial
- Flush mounted, Exposed
- Cable Protection and Routing
- Cable Management System with support and connection accessories
- Cable Puller inside (Galvanized Wire Ø0,8mm - TensileF_750N)

CODE	TYPE	DIAMETER		LENGTH m	PACKING m
		D1/mm	D2/mm		
31-21076-016	16	16	11	100	100
31-21077-020	20	20	14	100	100
31-21078-025	25	25	19,2	50	50
31-21079-032	32	32	24,3	50	50



DOMO SPIRAL HFFR - Medium Type 750N



PRODUCT DESCRIPTION

- Corrugated, Pliable - Spiral
- Material : Modified Thermoplastic Polyolefin
- No flame propagation, Self Extinguishing
- Halogen Free

APPLICATIONS - INSTALLATIONS

- Indoor - Residential - Industrial
- Cable Protection and Routing
- Wiring, Power, Automation, Lighting
- Exposed, Wall mounted, InFloor, InConcrete, Drywall, Prefab
- Cable Management System with support and connection accessories

CODE	TYPE	DIAMETER		LENGTH m	PACKING m
		D1/mm	D2/mm		
31-21200-016	16	16	10,7	100	100
31-21201-020	20	20	13,7	100	100
31-21202-025	25	25	18,9	50	50
31-21203-032	32	32	24,3	50	50
31-21204-040	40	40	31,2	25	25
31-21205-050	50	50	39,6	25	25



COMBO RIGID HFFR - Light Type 320N



PRODUCT DESCRIPTION

- Rigid Conduit
- Material : Modified Thermoplastic Polyolefin
- No flame propagation, Self Extinguishing
- Halogen Free

APPLICATIONS - INSTALLATIONS

- Indoor - Residential - Industrial
- Flush mounted, Exposed
- Cable Protection and Routing
- Cable Management System with support and connection accessories

CODE	TYPE	DIAMETER		LENGTH m	PACKING m
		D1/mm	D2/mm		
30-21070-016	16	16	13,5	3	300
30-21071-020	20	20	17,3	3	210
30-21072-025	25	25	22,1	3	120
30-21073-032	32	32	28,9	3	75
30-21074-040	40	40	36,6	3	45
30-21075-050	50	50	46,1	3	45
30-21076-063	63	63	58,4	3	45



COMBO RIGID HFFR - Light Type 320N + Sleeve




PRODUCT DESCRIPTION

- Rigid Conduits
- Material : Modified Thermoplastic Polyolefin
- No flame propagation, Self Extinguishing
- Halogen Free

APPLICATIONS - INSTALLATIONS

- Indoor - Residential - Industrial
- Flush mounted, Exposed
- Cable Protection and Routing
- Cable Management System with support and connection accessories
- 3m length Sleeved one edge

CODE	TYPE	DIAMETER		LENGTH m	PACKING m
		D1/mm	D2/mm		
30-21080-016	16	16	13,5	3	270
30-21081-020	20	20	17,3	3	180
30-21082-025	25	25	22,1	3	120
30-21083-032	32	32	28,9	3	75

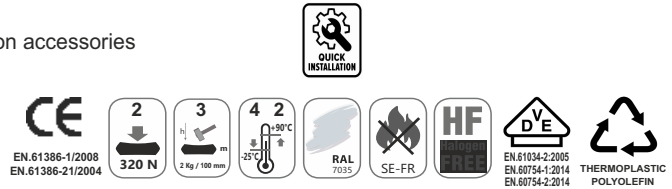

DOMO RIGID HFFR - Medium Type 750N



PRODUCT DESCRIPTION

- Rigid Conduits
- Material : Modified Thermoplastic Polyolefin
- No flame propagation, Self Extinguishing
- Halogen Free

APPLICATIONS - INSTALLATIONS

- Indoor - Residential - Industrial
- Cable Protection and Routing
- Wiring, Power, Automation, Lighting
- Exposed, Wall mounted, InFloor, InConcrete, Drywall, Prefab
- Cable Management System with support and connection accessories - Recommended clips installation per 50cm

CODE	TYPE	DIAMETER		LENGTH m	PACKING m
		D1/mm	D2/mm		
30-21030-016	16	16	12,5	3	150
30-21031-020	20	20	16,9	3	150
30-21032-025	25	25	21,4	3	75
30-21033-032	32	32	27,7	3	75
30-21034-040	40	40	36	3	45
30-21035-050	50	50	45	3	45
30-21036-063	63	63	57,8	3	45



FORTE RIGID HFFR - Heavy Type 1250N




PRODUCT DESCRIPTION

- Rigid Conduits
- Material : Modified Thermoplastic Polyolefin
- No flame propagation, Self Extinguishing
- Halogen Free

APPLICATIONS - INSTALLATIONS

- Indoor - Residential - Industrial
- Cable Protection and Routing
- Wiring, Power, Automation, Lighting
- Exposed, Wall mounted, InFloor, InConcrete, Drywall, Prefab
- Cable Management System with support and connection accessories - Recommended clips installation per 50cm

CODE	TYPE	DIAMETER		LENGTH m	PACKING m
		D1/mm	D2/mm		
30-21050-016	16	16	11,7	3	150
30-21051-020	20	20	15,5	3	150
30-21052-025	25	25	20,2	3	75
30-21053-032	32	32	27,0	3	75



COUPLING RIGID HF



PRODUCT DESCRIPTION - APPLICATIONS

- Join two runs of Rigid Conduits
- Material : Modified Thermoplastic Polyolefin
- No flame propagation, Self Extinguishing
- Ingress Protection : IP54
- Halogen free

CODE	TYPE	OD CONDUIT	PACKING Pcs
38-20030-016	16	Ø 16mm	50
38-20031-020	20	Ø 20mm	50
38-20032-025	25	Ø 25mm	50
38-20033-032	32	Ø 32mm	10

COUPLING SPIRAL HF



PRODUCT DESCRIPTION - APPLICATIONS

- Join two runs of Corrugated Conduits
- Material : Modified Thermoplastic Polyolefin
- No flame propagation, Self Extinguishing
- Ingress Protection : IP54
- Halogen free

CODE	TYPE	OD CONDUIT	PACKING Pcs
38-20020-016	16	Ø 16mm	50
38-20021-020	20	Ø 20mm	50
38-20022-025	25	Ø 25mm	50
38-20023-032	32	Ø 32mm	10

BEND 90° HF



PRODUCT DESCRIPTION - APPLICATIONS

- Join like with like and introduce a curve to the length of conduit
- Material : Modified Thermoplastic Polyolefin
- No flame propagation, Self Extinguishing
- Ingress Protection : IP54
- Halogen free

CODE	TYPE	OD CONDUIT	PACKING Pcs
39-20020-016	16	Ø 16mm	50
39-20021-020	20	Ø 20mm	50
39-20022-025	25	Ø 25mm	10
39-20023-032	32	Ø 32mm	5

SNAP CLIP HF



PRODUCT DESCRIPTION - APPLICATIONS

- SNAP Clip, secures the Conduit run to wall or joist
- Installations: Exposed Wall Mounted
- Ability to connect and assemble on a rail
- No flame propagation, Flame Retardant
- Fits with SPIRAL and RIGID conduits
- Recommended installation per 50cm
- Halogen Free

CODE	TYPE	OD CONDUIT	PACKING Pcs
34-21001-016	16	Ø 16mm	100
34-21002-020	20	Ø 20mm	100
34-21003-025	25	Ø 25mm	100
34-21004-032	32	Ø 32mm	100
34-21005-040	40	Ø 40mm	50
34-21006-050	50	Ø 50mm	50

ΩMEGA CLIP HF



PRODUCT DESCRIPTION - APPLICATIONS

- ΩMEGA Clip, secures the Conduit run to Wall or Ceiling
- Installations: Exposed Wall Mounted
- Ability to connect and assemble on a rail
- No flame propagation, Flame Retardant
- Fits with SPIRAL and RIGID conduits
- Recommended installation per 50cm
- Halogen Free

CODE	TYPE	OD CONDUIT	PACKING Pcs
41-20001-016	16	Ø 16mm	100
41-20002-020	20	Ø 20mm	100
41-20003-025	25	Ø 25mm	50
41-20004-032	32	Ø 32mm	50

COUPLINGS / Conduit > Box



PRODUCT DESCRIPTION APPLICATIONS

- Connect Conduit run to an Watertight Box
- Locknut, ISO Metric screw thread
- Ingress Protection : IP67
- Halogen Free

CODE	TYPE	THREAD Metric	OD CONDUIT DIAMETER	PACKING Pcs
33-20030-016	16	M16x1.5	Ø 16mm	10
33-20031-020	20	M20x1.5	Ø 20mm	10
33-20032-025	25	M25x1.5	Ø 25mm	10
33-20033-032	32	M32x1.5	Ø 32mm	10

