


# FLUSH MOUNTING BOXES

## ULTRA JUNCTION BOXES

### TECHNICAL DATA SHEET

Reference	LVD 2014/35/EU		
Directives & Standards	EN 60670-1:2005+A1:2013 Boxes and Enclosures, Electrical Installations EN 60670-22:2006 Boxes and Enclosures, Particular Requirements		
Amount of Halogen Acid Gas:	DIN EN 60754-1 (VDE 0482-754-1) : 2015-08 EN 60754-1:2014		
Applications	In Door - Residential - Industrial		
Installations	Plastic Square Junction box with removable cover Wiring junction or extension With Knockout Conduits entries Flush mounting – Masonry		
Structural Material	Modified Thermoplastic Polyolefin		
Characteristics	IP Rate	3X	
	Glow Wire Test	650 °C	
	Resistance UV	LR	
	Resistance Chemicals	R	
	Resistance Fire	FR-SE	
	Dielectric strength	400V	
	Temperature Range	-15 °C	+60 °C
Reference	Color: Box	Orange (RAL 2004)	Lid White




## FLUSH MOUNTING BOXES

### JUNCTION ULTRA 155 x 105




TYPE	ULTRA 155x105	LID 155x105
CODE	08-210 05-155	09-210 05-155
A / mm	105	-
B / mm	155	-
C / mm	45	47
E / mm	165	165
Entries Max OD Ø20mm		
Entries Max OD Ø20/28mm		
Packing / pcs	30	1

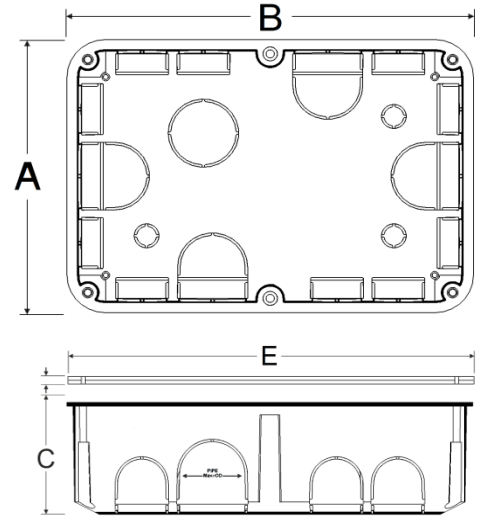

### JUNCTION ULTRA 155 x 125



TYPE	ULTRA 155x125	LID 155x125
CODE	08-210 06-125	09-210 06-125
A / mm	125	-
B / mm	150	-
C / mm	50	52
E / mm	165	165x145
Entries Max OD Ø32mm	9	
Packing / pcs	40	1

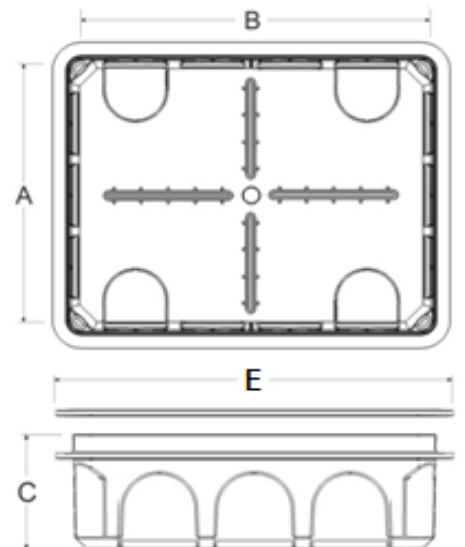


## FLUSH MOUNTING BOXES

### JUNCTION ULTRA 190 x 145



TYPE	ULTRA 190x145	LID 190x145
CODE	08-210 07-190	09-210 07-190
A / mm	145	-
B / mm	190	-
C / mm	50	53
E / mm	210	210x165
Entries Max OD Ø32mm	14	
Packing / pcs	20	1

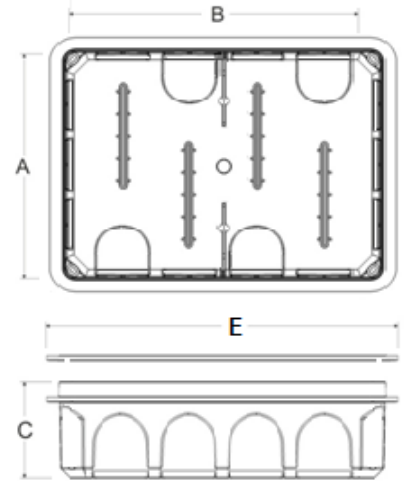

### JUNCTION ULTRA 290 x 145



TYPE	ULTRA 290x145	LID 290x145
CODE	08-210 08-290	09-210 08-290
A / mm	145	-
B / mm	290	-
C / mm	50	53
E / mm	305	305x165
Entries Max OD Ø32mm	18	
Packing / pcs	10	1

