



01

**PLIABLE CONDUITS
CORRUGATED**

COMBO SPIRAL ECO - Light Type 320N



PRODUCT DESCRIPTION

- Pliable, Corrugated - (Spiral)
- Compression resistant : Light >320N
- Material : Polyvinil Chloride (U-PVC)
- No flame propagation, Self Extinguishing

APPLICATIONS - INSTALLATIONS

- Indoor - Residential - Industrial
- Flush mounted
- Cable Protection and Routing through masonry

CODE	TYPE	DIAMETER		LENGTH	PACKING
		OD/mm	ID/mm	m	m
31-21050-016	16	16	11,5	50	200
31-21051-020	20	20	15,3	50	200
31-21052-025	25	25	19,2	50	50
31-21053-032	32	32	25,4	50	50



COMBO SPIRAL ECO - Light Type 320N + Wire Puller



PRODUCT DESCRIPTION

- Pliable, Corrugated - (Spiral)
- Compression resistant : Light >320N
- Material : Polyvinil Chloride (U-PVC)
- No flame propagation, Self Extinguishing

APPLICATIONS - INSTALLATIONS

- Indoor - Residential - Industrial
- Flush mounted
- Cable Protection and Routing through masonry
- Cable Puller inside
- > Galvanized Wire Ø0,8mm - TensileF_750N

CODE	TYPE	DIAMETER		LENGTH	PACKING
		OD/mm	ID/mm	m	m
31-21060-016	16	16	11,5	50	200
31-21061-020	20	20	15,3	50	200
31-21062-025	25	25	19,2	50	50
31-21063-032	32	32	25,4	50	50



DOMO SPIRAL ECO - Medium Type 750N




PRODUCT DESCRIPTION

- Pliable, Corrugated - (Spiral)
- Compression resistant : Medium >750N
- Material : Polyvinil Chloride (U-PVC)
- No flame propagation, Self Extinguishing
- UV Resistant

APPLICATIONS - INSTALLATIONS

- Indoor - Outdoor - Residential - Industrial
- Exposed, Wall Mounted - In floor - In concrete - On Wood
- Cable Protection, Routing > Power - Lighting - Automation
- conduits Cable Management System with Accessories

CODE	TYPE	DIAMETER		LENGTH	PACKING
		OD/mm	ID/mm	m	m
31-21100-016	16	16	11	100	100
31-21101-020	20	20	15	100	100
31-21102-025	25	25	19	75	75
31-21103-032	32	32	25	50	50
31-21104-040	40	40	31,5	25	25
31-21105-050	50	50	40	25	25

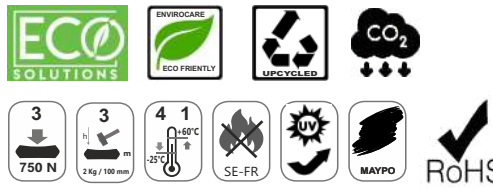

DOMO SPIRAL ECO - Medium Type 750N + Wire Puller



PRODUCT DESCRIPTION

- Pliable, Corrugated - (Spiral)
- Compression resistant : Medium >750N
- Material : Polyvinil Chloride (U-PVC)
- No flame propagation, Self Extinguishing
- UV Resistant

APPLICATIONS - INSTALLATIONS

- Indoor - Outdoor - Residential - Industrial
- Exposed, Wall Mounted - In floor - In concrete - On Wood
- Cable Protection, Routing > Power - Lighting - Automation
- Conduits Cable Management System with Accessories
- Cable Puller inside > Galvanized Wire Ø0,8mm - TensileF_750N

CODE	TYPE	DIAMETER		LENGTH	PACKING
		OD/mm	ID/mm	m	m
31-21106-016	16	16	11	100	100
31-21107-020	20	20	15	100	100
31-21108-025	25	25	19	75	75
31-21109-032	32	32	25	50	50





SPIRAL - PLIABLE CONDUITS

SPIRAL DIN - Light Type 320N



PRODUCT DESCRIPTION

- Pliable, Corrugated - (Spiral)
- Compression resistant : Light >320N
- Material : Polyvinil Chloride (U-PVC)
- No flame propagation, Self Extinguishing

APPLICATIONS - INSTALLATIONS

- Indoor - Residential - Industrial
- Flush mounted
- Cable Protection and Routing through masonry
- Rigid pipe **COURLINE DIN E/T** fits Internally as system

CODE	TYPE	DIAMETER		LENGTH m	PACKING m
		OD/mm	ID/mm		
03-21035-011	11	15,8	12,4	50	200
03-21036-013	13,5	19	14,7	50	200
03-21037-016	16	21,5	17	50	200
03-21038-023	23	29	24,4	25	100
03-21034-029	29	34,8	29,3	25	50



EN.61386-22/2004
EN.61386-1/2008
DIN 49018-1



COMBO SPIRAL - Light Type 320N



PRODUCT DESCRIPTION

- Corrugated, Pliable - Spiral
- Material : Polyvinil Chloride (U-PVC)
- Compression resistant : Light >320N
- No flame propagation, Self Extinguishing

APPLICATIONS - INSTALLATIONS

- Indoor - Residential - Industrial
- Flush mounted
- Cable Protection and Routing through masonry
- Cable Management System with support and connection accessories

CODE	TYPE	DIAMETER		LENGTH m	PACKING m
		OD/mm	ID/mm		
31-21025-016	16	16	11,5	50	200
31-21026-020	20	20	15,3	50	200
31-21027-025	25	25	19,2	50	50
31-21028-032	32	32	25,4	50	50



EN.61386-1/2008
EN.61386-22/2004



COMBO SPIRAL - Light Type 320N + Wire Puller




PRODUCT DESCRIPTION

- Pliable, Corrugated - (Spiral)
- Compression resistant : Light >320N
- Material : Polyvinil Chloride (U-PVC)
- No flame propagation, Self Extinguishing

APPLICATIONS - INSTALLATIONS

- Indoor - Residential - Industrial
- Flush mounted
- Cable Protection and Routing through masonry
- Cable Puller inside
- > Galvanized Wire Ø0,8mm - TensileF_750N

CODE	TYPE	DIAMETER		LENGTH m	PACKING m
		OD/mm	ID/mm		
31-21037-016	16	16	11,5	50	200
31-21038-020	20	20	15,3	50	200
31-21039-025	25	25	19,2	50	50
31-21040-032	32	32	25,4	50	50



EN.61386-1/2008
EN.61386-22/2004



SPIRAL - PLIABLE CONDUITS



DOMO SPIRAL - Medium Type 750N



PRODUCT DESCRIPTION

- Pliable, Corrugated - (Spiral)
- Compression resistant : Medium >750N
- Material : Polyvinil Chloride (U-PVC)
- No flame propagation, Self Extinguishing
- UV Resistant

APPLICATIONS - INSTALLATIONS

- Indoor - Outdoor - Residential - Industrial
- Exposed, Wall Mounted - In floor - In concrete - On Wood
- Cable Protection, Routing > Power - Lighting - Automation
- Cable Management System with Support and Connection Accessories

CODE	TYPE	DIAMETER		LENGTH m	PACKING m
		OD/mm	ID/mm		
31-21001-016	16	16	11	50	50
31-21002-020	20	20	15	50	50
31-21003-025	25	25	19	50	50
31-21004-032	32	32	25	50	50
31-21005-040	40	40	31,5	25	25
31-21006-050	50	50	40	25	25



DOMO SPIRAL - Medium Type 750N + Wire Puller



PRODUCT DESCRIPTION

- Pliable, Corrugated - (Spiral)
- Compression resistant : Medium >750N
- Material : Polyvinil Chloride (U-PVC)
- No flame propagation, Self Extinguishing
- UV Resistant

APPLICATIONS - INSTALLATIONS

- Indoor - Outdoor - Residential - Industrial
- Exposed, Wall Mounted - In floor - In concrete - On Wood
- Cable Protection, Routing > Power - Lighting - Automation
- Cable Management System with Support and Connection Accessories
- Cable Puller inside > Galvanized Wire Ø0,8mm - TensileF_750N

CODE	TYPE	DIAMETER		LENGTH m	PACKING m
		OD/mm	ID/mm		
31-21031-016	16	16	11	50	50
31-21032-020	20	20	15	50	50
31-21033-025	25	25	19	50	50
31-21034-032	32	32	25	50	50



FORTE SPIRAL - Heavy Type 1250N



PRODUCT DESCRIPTION

- Pliable, Corrugated - (Spiral)
- Compression resistant : Heavy >1250N
- Material : Polyvinil Chloride (U-PVC)
- No flame propagation, Self Extinguishing
- UV Resistant

APPLICATIONS - INSTALLATIONS

- Indoor - Outdoor - Residential - Industrial
- Exposed, Wall Mounted - In floor - In concrete - On Wood
- Cable Protection, Routing > Power - Lighting - Automation
- Cable Management System with Support and Connection Accessories

CODE	TYPE	DIAMETER		LENGTH m	PACKING m
		OD/mm	ID/mm		
31-21007-016	16	16	10,8	25	25
31-21008-020	20	20	14,1	25	25
31-21009-025	25	25	18,3	25	25
31-21010-032	32	32	24,3	25	25
31-21011-040	40	40	31	25	25
31-21012-050	50	50	39,5	25	25





ACCESSORIES

COUPLINGS



PRODUCT DESCRIPTION - APPLICATIONS

- Joins two runs of Conduits
- Material : Polyvinyl Chloride (U-PVC)
- No flame propagation, Self Extinguishing
- Ingress Protection : IP54

CODE	TYPE	OD CONDUIT	PACKING/Pcs	
			Bag	Box
38-21001-016	16	Ø 16mm	50	400
38-21002-020	20	Ø 20mm	50	250
38-21003-025	25	Ø 25mm	50	150
38-21004-032	32	Ø 32mm	10	80
38-21005-040	40	Ø 40mm	10	50
38-21006-050	50	Ø 50mm	10	30



CLIPS SNAP



PRODUCT DESCRIPTION - APPLICATIONS

- SNAP Clip, secures the Conduit run to wall or joist
- Installations: Exposed Wall Mounted
- Ability to connect and assemble on a rail
- No flame propagation, Flame Retardant
- Halogen Free
- Recommended installation per 50cm

CODE	TYPE	OD CONDUIT	PACKING/Pcs	
			Bag	Box
34-21001-016	16	Ø 16mm	100	2500
34-21002-020	20	Ø 20mm	100	2000
34-21003-025	25	Ø 25mm	100	1600
34-21004-032	32	Ø 32mm	100	1500
34-21005-040	40	Ø 40mm	50	-
34-21006-050	50	Ø 50mm	50	-



CLIPS OMEGA



PRODUCT DESCRIPTION - APPLICATIONS

- OMEGA Clip, secures the conduit run to Wall or Ceiling
- Installations: Exposed Wall Mounted
- Ability to connect and assemble on a rail
- No flame propagation, Flame Retardant
- Halogen Free
- Recommended installation per 50cm

CODE	TYPE	OD CONDUIT	PACKING/Pcs	
			Bag	Box
41-20001-016	16	Ø 16mm	100	1000
41-20002-020	20	Ø 20mm	100	800
41-20003-025	25	Ø 25mm	100	700
41-20004-032	32	Ø 32mm	100	500



GLANDS Pipe > Box



DESCRIPTION - APPLICATIONS

- Screwed-Fit
- Connect Conduit run to an Watertight Box
- Locknut, ISO Metric screw thread
- Ingress Protection : IP54
- Installations: Exposed Wall Mounted

CODE	TYPE	OD.CONDUIT	NUT THREAD Metric	INSTALLØ	PACKING
					Pcs
33-20030-016	16	Ø 16mm	M16	Ø 23mm	10
33-20031-020	20	Ø 20mm	M20	Ø 23mm	10
33-20032-025	25	Ø 25mm	M25	Ø 29mm	10
33-20033-032	32	Ø 32mm	M32	Ø 37mm	10

