





## DOUBLE WALL CORRUGATED PIPES ACCESSORIES

COUPLING	CAP	DOUBLE INSTALLATION SUPPORT	TRIPLE INSTALLATION SUPPORT
			

### TECHNICAL DATA SHEET

Directive	LVD 2014/35/EU
Directives & Standards	EN 61386-1:2008 Cable Management General Requirements EN 61386-24:2010 Conduit systems buried underground
RoHS Compliance	2022/95/EC , RoHS
Amount of Halogen acid gas:	DIN EN 60754-1 (VDE 0482-754-1) : 2015-08 EN 60754-1:2014
Applications	Underground - Outdoor
Installations	Installation accessories for Double Wall Conduit Cable routing Management , Buried underground
Material	Modified Thermoplastic Polyolefin
Temperature Range	- 15°C
	+ 90°C

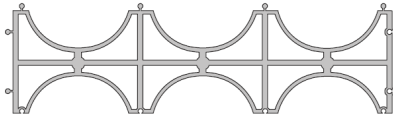

TYPE	32	40	50	63	75	90	110	125	140	160	200
COUPLING	43-201 10-032	43-201 00-040	43-201 01-050	43-201 02-063	43-201 03-075	43-201 04-090	43-201 05-110	43-201 06-125	43-201 07-140	43-201 08-160	43-201 09-200
		-	43-200 00-040	43-200 01-050	43-200 02-063	43-200 03-075	43-200 04-090	43-200 05-110	-	-	43-200 08-160
CAP											
Dimension Ø (mm):	32	40	50	63	75	90	110	125	140	160	200
Packing (pcs):	1	1	1	1	1	1	1	1	1	1	1

DOUBLE SUPPORT	90	110	125	160
CODE:	34-201 04-090	34-201 05-110	34-201 06-125	34-201 08-160
Pipe Installation	90	110	125	160
Packing (pcs):	1	1	1	1

TRIPLE SUPPORT	110	125	160
ΚΩΔΙΚΟΣ:	34-202 05-110	34-202 06-125	34-202 08-160
Pipe Installation	110	125	160
Packing (pcs):	1	1	1