





SWITCH BOX SUPER ECO



PRODUCT DATA SHEET

Reference	LVD 2014/35/EU		
Directives & Standards	EN 60670-1:2005+A1:2013 Boxes and Enclosures, Electrical Installations EN 60670-22:2006 Boxes and Enclosures, Particular Requirements		
Amount of Halogen Acid Gas:	DIN EN 60754-1 (VDE 0482-754-1) : 2015-08 EN 60754-1:2014		
ECO Solution	With a low environmental footprint contributing to the reduction of CO2 and the consumption of fossil fuels.		
Applications	Internal - Residential - Industrial Plastic box for Installation - various one-Gang elements Lighting Switches, Plug Sockets etc		
Installations	Knockout entries for Conduits, Cables Flush Mounting – Masonry		
Structural Material	Modified Thermoplastic Polyolefin		
Characteristics	IP Rate	3X	
	Glow Wire Test	650 °C	
	UV Resistance	LR	
	Chemicals Resistance	R	
	Dielectric strength	400V	
	Temperature Range	-15 °C	+60 °C
	Color	Black	

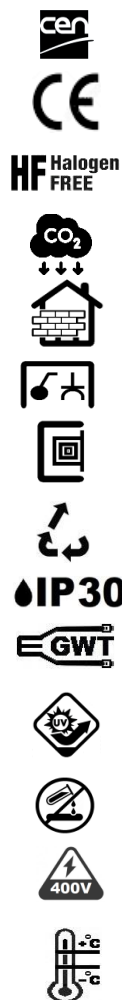

ΤΥΠΟΣ	SUPER ECO	EXTENSION 10	EXTENSION 20	Switch Combinations
ΚΩΔΙΚΟΣ	08-21019-001	08-21060-001	08-21061-001	
A / mm	92	-	-	
B / mm	65	-	-	
C / mm	42	-	-	
C+C1 / mm	52	10	-	
C+C2 / mm	62	-	20	
Συσκευασία / pcs	100			

